



ASHOK LEYLAND
ENGINEERING YOUR TOMORROWS

Lynx

SCHOOL BUS



ENSURING THE HIGHEST
STANDARDS OF SAFETY

120 PS 'H' SERIES ENGINE
CMVR STIPULATED SEATING LAYOUT
EXTENSIVE SAFETY FEATURES
NEW INTERNATIONAL LOOK




HINDUJA GROUP

Every parent demands and expects high standards of safety when it comes to their child. Ensuring these standards are met, is a responsibility thrust upon every school.

We at Ashok Leyland extend our support in sharing this responsibility, and providing you with a state-of-the-art transport solution that ensures the highest standards of safety. With an ultra-low entry slide-step, the A+ Lynx range of school buses allows even the little ones to board and alight without assistance. In addition to individual seat belts to secure children to their seats, hand-rests on the aisle seats also keep them safe and prevent them from falling off in case of sharp turns. The large windows are guarded with grills so children can safely enjoy the fresh air without fear. The A+ Lynx leaves nothing to chance and comes equipped with a fire extinguisher, clearly demonstrating the seriousness with which safety features have been tackled. The bus also allows for two large exits in case of emergencies.

The A+ Lynx without doubt provides a comfortable travel experience that is also economic and trouble-free. Together we shall carry the future-shapers of our nation to school.

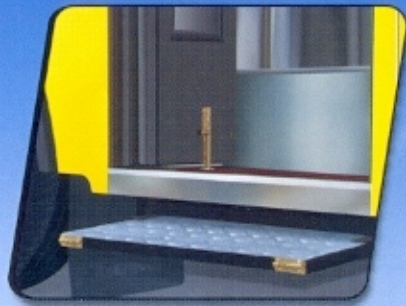

Ultra-low entry slide-step



Seat belts



Fire extinguisher



Large emergency exit window





Window railings for safety



Emergency exit door




Grab handles and bottle-holders



Hand-rests



Notice board for announcements

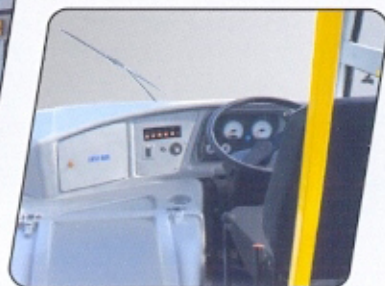


Contemporary and service-friendly interiors

TECHINICAL SPECIFICATIONS

	BSIII Chassis / Fully-built		
Engine	'H' series 4CTI electronically controlled		
Maximum power	120 ps @ 2400 rpm		
Maximum torque	41 kgm @ 1600 rpm		
Clutch	310 dia single plate dry-type, hydraulic actuation		
Gearbox	5-speed ZF synchromesh gearbox		
Frame	All steel ladder-type		
Front axle	I Section Reverse Elliot-type		
Rear axle	5.57		
Suspension	Semi-elliptic multi-leaf with shock absorbers in front and rear		
Brakes	Full-air dual-line S-cam brakes		
Parking brakes	Spring actuated, pneumatic (on rear only)		
Wheel base	3900	4200	4900
Seating capacity	37 + D	41 + D	49 + D
Battery	12 V-150 Ah	12 V-150 Ah	12 V - 120 Ah
Tyres	8.25 x 20 - 14 PR	8.25 x 20 - 14 PR	8.25 x 20 - 16 PR
Front overhang (chassis)	1246	1246	1246
Rear overhang (chassis)	2340	2520	2940
Overall length (chassis)	7486	7966	9330
Overall width	2500	2500	2500
Front track	1918	1918	1918
Rear track	1816	1816	1816
Min. ground clearance	231	231	231
GVW (kgs)	11000	11000	10850


(All dimensions are in mm)

Lynx New-Look 3900 mm WB - 37 + D - Standard seats

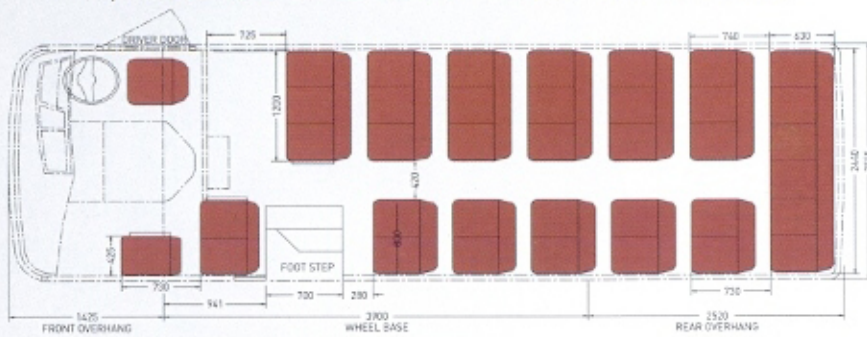


Double Door Option: Lynx 3900 - Seating capacity 34

Lynx New-Look 4200 mm WB - 41 + D - Standard seats

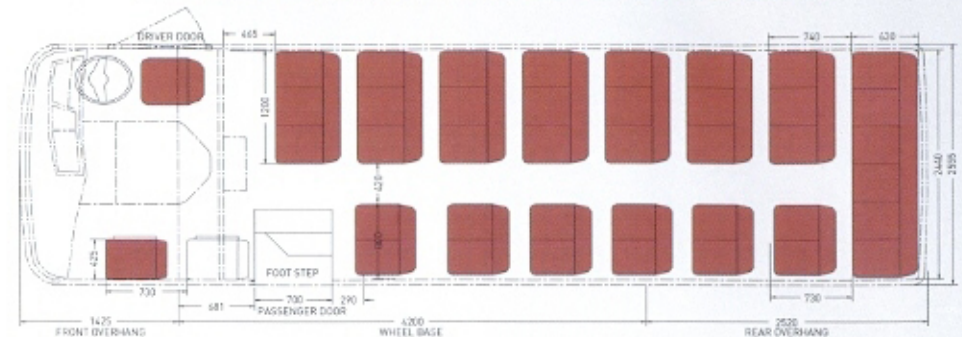

Double Door Option: Lynx 4200 - Seating capacity 39

Lynx New-Look 4900 mm WB - 49 + D - Standard seats

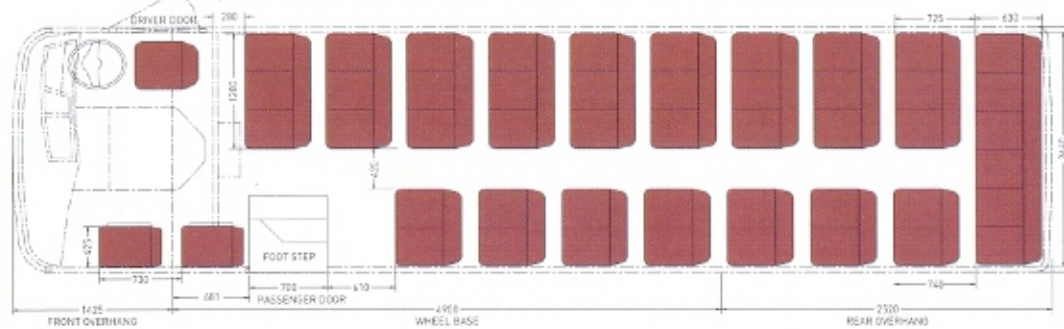

Double Door Option: Lynx 4900 - Seating capacity 47

Specifications are subject to change due to continuous improvements and are for reference only.



Total Maintenance Solutions



Covers Vehicle Aggregates
For 3 Years / 3,00,000 kms



Hassle-free Maintenance
For 2 Years / 2,00,000 kms



Original Quality Parts



1800-266-3340
24 X 7 National Helpline



ASHOK LEYLAND
ENGINEERING YOUR TOMORROWS

No.1, Sardar Patel Road, Guindy, Chennai - 600 032. P: (044) 2220 6000 F: (044) 2220 6001 W: www.ashokleyland.com

